


BB
#17



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 899 978 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.03.1999 Bulletin 1999/09

(51) Int Cl.⁶: **H04Q 7/32**

(21) Application number: **98306967.5**

(22) Date of filing: **28.08.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Lee, Hye-Young**
Kuro-gu, Seoul (KR)

(30) Priority: **28.08.1997 KR 4186797**

(74) Representative:
Tunstall, Christopher Stephen et al
Dibb Lupton Alsop,
Fountain Precinct
Balm Green, Sheffield S1 1RZ (GB)

(71) Applicant: **Samsung Electronics Co., Ltd.**
Suwon-City, Kyungi-do (KR)

(54) **Short message transmission**

(57) A digital mobile communication terminal with a SMS (Short Message Service) function stores user predefined messages which are frequently used and transmits a short message by using the user predefined messages. The communication terminal determines whether a short message transmission mode is set through a user interface and then determines whether a user pre-

defined message using mode is set. The user predefined messages are read in sequence from the memory and displayed on a display and a selected one of the user predefined messages is displayed and edited according to edit data or input data received from the user interface. After editing the short message, the communication terminal transmits the edited short message to a designated telephone number.

EP 0 899 978 A2

Description

BACKGROUND TO THE INVENTION

[0001] The present invention relates to a short message service function of a mobile communication terminal such as a CDMA (Code Division Multiple Access) or PCS (Personal Communication Services) terminal, and in particular, to a method for transmitting a short message using user predefined messages.

[0002] In a conventional digital mobile communication terminal with a short message service (SMS) function, a user of the terminal must himself input a short message every time he wished to transmit a short message. Usually, the digital mobile communication terminal does not have character keys for exclusive use of the SMS function, so the user must depress numeric keys several times to input a specific character message.

[0003] Thus, the user must manipulate the keys many times to transmit even a short message, which can be annoying and time-consuming. On this account, the user may avoid using the SMS function.

SUMMARY OF THE INVENTION

[0004] It is therefore an object of the present invention to provide an improved method of transmitting short messages.

[0005] To achieve the above object, the present invention provides a method of transmitting a short message in a digital mobile communication terminal having a user interface and a memory containing a plurality of predefined messages, comprising detecting the selection of one of the stored predefined messages through the user interface and transmitting the selected message.

[0006] Preferably, the mobile communication terminal has a short message transmission mode and a predefined message transmission mode and the method comprises determining that the short message transmission mode has been set through user interface means and determining that the predefined message transmission mode is set.

[0007] The selection of one of the predefined messages may be detected by reading in sequence from the memory, and displaying, the predefined messages and detecting the selection of one of the displayed messages through the user interface.

[0008] The method may comprise displaying the selected predefined message and modifying it in accordance with edit data or input data received through the user interface prior to transmission.

[0009] Preferably, the selected message is transmitted by determining whether a telephone number for a called party is input through the user interface means, determining whether a telephone number for a calling party is input through the user interface means, when the telephone number for the called party is input, de-

termining whether a message transmission command is input through the user interface means and upon receipt of the message transmission command, transmitting the edited message to the telephone number for the called party.

[0010] The predefined messages may be stored in the memory by receiving a message storing command through the user interface, displaying first display data requesting a user to input a predefined message, receiving a message through the user interface and storing the message received in the memory as a predefined message.

[0011] The present invention also extends to a digital mobile communication terminal having a user interface, a memory containing a plurality of predefined messages and control means adapted to detect the selection of one of the stored predefined messages through the user interface and to transmit the selected message as a short message.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The present invention will now be described by way of example with reference to the accompanying drawings in which:

FIG. 1 is a block diagram of a digital mobile communication terminal; and

FIGs. 2A and 2B are flow charts illustrating the procedure for transmitting a short message.

DETAILED DESCRIPTION OF THE INVENTION

[0013] It is to be noted that the present invention is applicable to a digital mobile communication terminal with the SMS function. The CPT (cellular Paging Teleservice) function mentioned below, corresponding to the PPT (PCS Paging Teleservice) function of the PCS terminal, is the SMS function of the CDMA terminal for transmitting only the telephone numbers of the called party and the calling party. The CMT (Cellular Message Teleservice) function corresponding to the PMT (PCS message Teleservice) function of the PCS terminal is the SMS function of the CDMA terminal for transmitting short user messages. The SMS function is specified in detail in the IS-637 and IS-95A Standards.

[0014] FIG. 1 shows a block diagram of a digital mobile communication terminal to which the present invention may be applied. As shown in this figure, a controller 10 controls the overall operations of the communication terminal. A memory 11 consists of a ROM (Read Only Memory) for storing a program of operation of the present invention, a RAM (Random Access Memory) for temporarily storing data generated during execution of the program and an EEPROM (Electrically Erasable and Programmable ROM) for storing user predefined messages.

[0015] An RF (Radio Frequency) module 15 demod-

ulates RF signals received from an antenna 14 and outputs the modulated RF signal to an encoder/decoder 16. Further, the RF module 15 modulates signals input from the encoder/decoder 16, converts the modulated signals to RF signals and radiates the RF signals through the antenna 14. The encoder/decoder 16, being an exclusive chip for the CDMA or PCS terminal, encodes the generated signal using CDMA or PCS technology under the control of the controller 10 and outputs the encoded signal to the RF module 15. Also, the encoder/decoder 16 decodes the signal input from the RF module 15 using CDMA or PCS technology and outputs the decoded signal to the controller 10. A keypad 12, being a user interface, includes a number of numeric keys for dialling and function keys for performing various functions, and generates key data to the controller 10 by the key manipulation of the user. A display 13, being an LCD (Liquid Crystal Display), displays display data under the control of the controller 10.

[0016] FIGs. 2A and 2B are flow charts illustrating the procedure of transmitting a short message in a digital mobile communication terminal according to the present invention. As illustrated, the procedure includes the steps of storing user predefined messages, reading and editing the stored user predefined messages and transmitting the edited messages.

[0017] Firstly, to store the user predefined messages, the user manipulates a message key to enter the SMS mode. The controller 10 then detects the message key input in step 20, and displays an SMS menu on the display 13 in step 21. Here, the SMS menu may include a mode for storing the user predefined messages and a mode for transmitting the short message (SMS mode), and assists the user in choosing between modes. By the help of the SMS menu, the user manipulates a mode select key to select the mode for storing the user predefined message.

[0018] If the user predefined message storing mode is selected in step 22, the controller 10 displays first display data on the display 13 in step 23. Here, the first display data may be data notifying the user to input the user predefined message that he desires to store. At the sight of the first display data, the user will input the user predefined message by manipulating the character keys. The controller 10 then receives in step 24 the user predefined message until a signal representing completion of the message input is input by the user in step 25. Here, the signal representing the completion of the message input may be generated by depression of a specific key. Thereafter, if a storage address is input in step 26, the controller 10 stores the user predefined message in the storage address in step 27.

[0019] However, if the user does not choose the message storage mode but chooses the SMS mode in the step 22, the controller 10 senses in step 28 that the SMS mode is selected and displays second display data on the display 13 in step 29. Here, the second display data may be data notifying the user to choose between the

CMT function and the CPT function. Then, the user chooses one of the CMT and CPT functions by manipulating the keys in answer to the second display data.

[0020] If the user chooses the CMT function in step 30, the controller 10 displays third display data on the display 13 in step 31. Here, the third display data may be data notifying the user to decide whether to use the predefined message in inputting the short message to be transmitted. If the user decides to use the user predefined message in step 32, the controller 10 displays a menu consisting of the user predefined messages on the display 13 in step 33. Then, the user will manipulate a select key to choose that one of the user predefined messages that is the most similar to the short message that he desires to transmit.

[0021] Upon sensing the selection of the user predefined message in step 34, the controller 10 displays the selected user predefined message on the display 13 in step 35. At the sight of the displayed user predefined message, the user edits, if necessary, the user predefined message through key manipulation in step 36.

[0022] However, if the user decides in the step 32 not to use the user predefined message but to input the message himself, the controller 10 receives the message that the user inputs by manipulating the keys and displays the input message on the display 13 in step 43. On receiving a signal representing completion of the message edit or the message input in step 37, the controller 10 displays fourth display data on the display 13 in step 38. Here, the fourth display data may be the message edited or input and data notifying the user to input the telephone numbers for the called party and the calling party. In compliance with the fourth display data, the user will input the telephone numbers for the called party and the calling party and input a send key for transmitting the short message.

[0023] The controller 10 then receives the telephone number for the called party to which the short message is to be transmitted in step 39 and the telephone number for the calling party in step 40, and transmits the short message to the called party upon receipt of the send key input in step 41.

[0024] However, if the user inputs the telephone numbers without editing the message in the step 36, the controller 10 jumps to the step 39. Similarly, if the user does not choose the CMT function in the step 30 and instead chooses the CPT function in step 44, the controller 10 also jumps to the step 39.

[0025] The message input in the step 43 may be stored as a user predefined message if desired.

[0026] As described above, the digital mobile communication terminal of the invention stores the user predefined messages that the user frequently uses and transmits a short message by allowing the selection and editing of that one of the stored user predefined messages which is closest to the message to be transmitted. Accordingly, the user can input the short message easily and comparatively quickly.

Claims

1. A method of transmitting a short message in a digital mobile communication terminal having a user interface and a memory containing a plurality of predefined messages, comprising:
5
detecting the selection of one of the stored predefined messages through the user interface;
and
transmitting the selected message.
10
2. A method according to claim 1 in which the mobile communication terminal has a short message transmission mode and a predefined message transmission mode and the method comprises:
15
determining that the short message transmission mode has been set through user interface means; and
determining that the predefined message transmission mode is set.
20
3. A method according to claim 1 or claim 2 in which the selection of one of the predefined messages is detected by:
25
reading in sequence from the memory, and displaying, the predefined messages; and
detecting the selection of one of the displayed messages through the user interface.
30
4. A method according to any preceding claim comprising displaying the selected predefined message and modifying it in accordance with edit data or input data received through the user interface prior to transmission.
35
5. A method according to any preceding claim in which the selected message is transmitted by:
40
determining whether a telephone number for a called party is input through the user interface means;
determining whether a telephone number for a calling party is input through the user interface means, when the telephone number for the called party is input;
45
determining whether a message transmission command is input through the user interface means; and
50
upon receipt of the message transmission command, transmitting the edited message to the telephone number for the called party.
55
6. A method according to any preceding claim further comprising storing the predefined messages in the memory by:
receiving a message storing command through the user interface;
displaying first display data requesting a user to input a predefined message;
receiving a message through the user interface; and
storing the message received in the memory as a predefined message.
7. A method of transmitting a short message in a digital mobile communication terminal as described herein with reference to the accompanying drawings.
10
8. A digital mobile communication terminal having a user interface, a memory containing a plurality of predefined messages and control means adapted:
15
to detect the selection of one of the stored predefined messages through the user interface; and
to transmit the selected message as a short message.
20
9. A digital mobile communication terminal as described herein with reference to the accompanying drawings
25

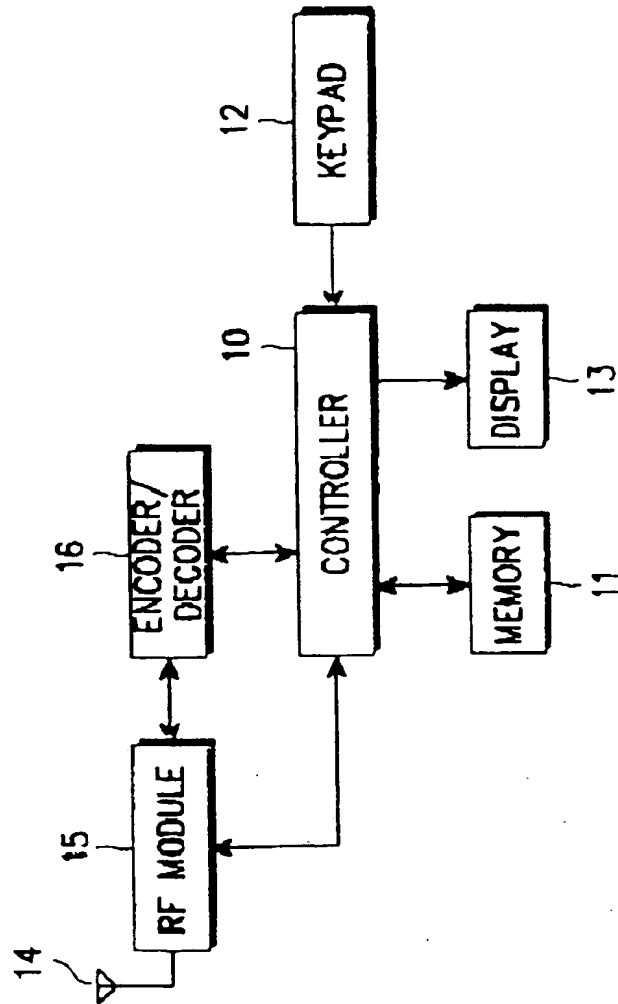


FIG. 1

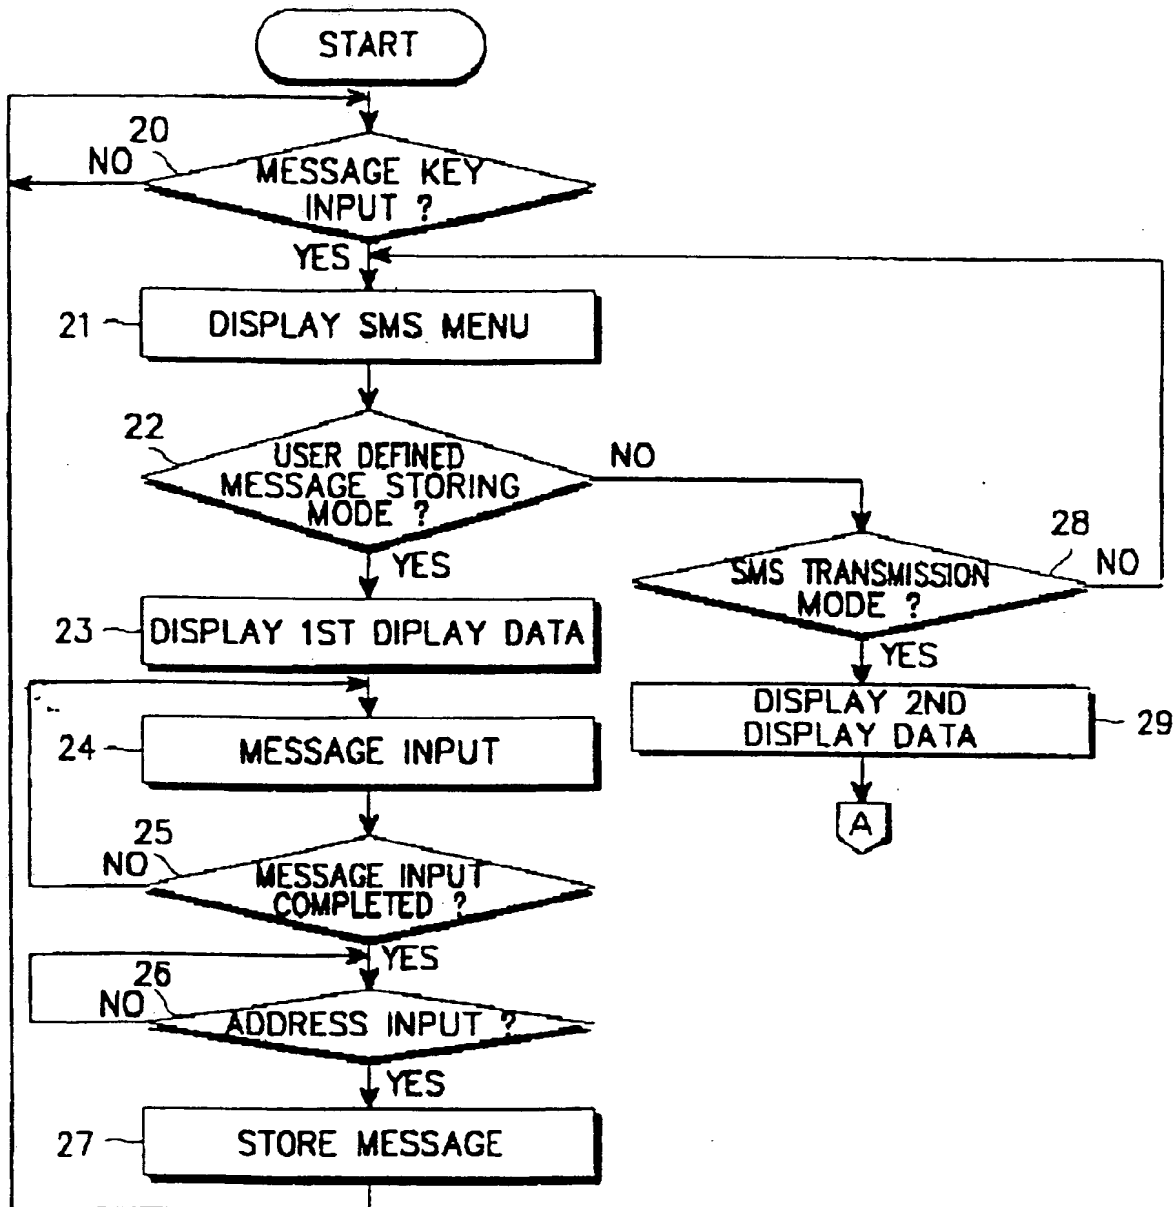


FIG. 2A


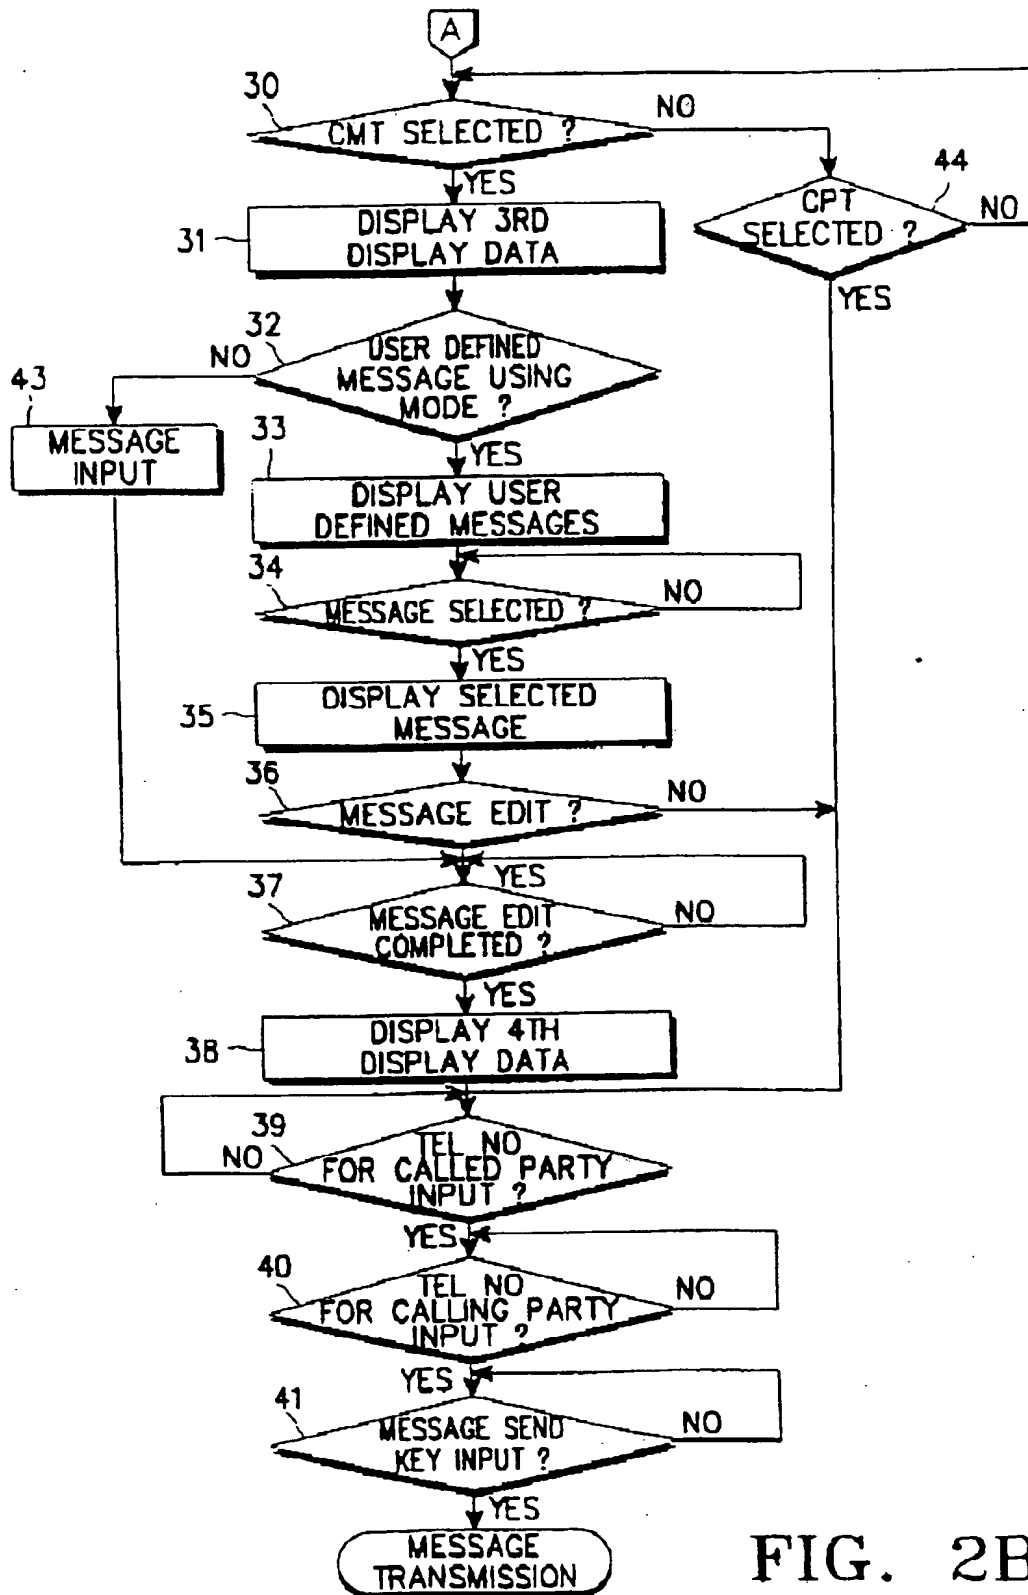


FIG. 2B

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 899 978 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
15.03.2000 Bulletin 2000/11

(51) Int Cl.7: **H04Q 7/32**

(43) Date of publication A2:
03.03.1999 Bulletin 1999/09

(21) Application number: **98306967.5**

(22) Date of filing: **28.08.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **28.08.1997 KR 4186797**

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
Suwon-City, Kyungki-do (KR)

(72) Inventor: **Lee, Hye-Young , Samsung Electronics
Co, Ltd**
Suwon-city, Kyungki-do (KR)

(74) Representative:
Tunstall, Christopher Stephen et al
Dibb Lupton Alsop,
Fountain Precinct
Balm Green, Sheffield S1 1RZ (GB)

(54) **Short message transmission**

(57) A digital mobile communication terminal with a SMS (Short Message Service) function stores user predefined messages which are frequently used and transmits a short message by using the user predefined messages. The communication terminal determines whether a short message transmission mode is set through a user interface and then determines whether a user pre-

defined message using mode is set. The user predefined messages are read in sequence from the memory and displayed on a display and a selected one of the user predefined messages is displayed and edited according to edit data or input data received from the user interface. After editing the short message, the communication terminal transmits the edited short message to a designated telephone number.

EP 0 899 978 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 6967

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 751 627 A (SONY CORP) 2 January 1997 (1997-01-02)	1-4,6,8	H04Q7/32
A	* column 4, line 32 - column 6, line 44; figure 4 *	5	
X	EP 0 783 219 A (NOKIA MOBILE PHONES LTD) 9 July 1997 (1997-07-09)	1-4,6,8	
A	* column 7, line 58 - column 10, line 32 *	5	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04Q
Place of search THE HAGUE		Date of completion of the search 18 January 2000	Examiner Tsapelis, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (PAX21)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 98 30 6967

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-01-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0751627 A	02-01-1997	JP 9018375 A	17-01-1997
		CN 1146671 A	02-04-1997
		US 5835569 A	10-11-1998
EP 0783219 A	09-07-1997	FI 960075 A	09-07-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)